

The AFFORDABLE,
PORTABLE,
& VERSATILE!

Carolina COOLER



Air Cooled



Water Cooled

The Carolina Cooler is a unique, service-friendly package air conditioner that is designed for a variety of special purpose, heavy-duty air conditioning applications. This compact, rugged unit can be used with duct work or it can be supplied with a distribution plenum for on-the-spot air delivery.

Check out the Advantages.

NORDIC AIR
INCORPORATED

5455 Route 307 West, Geneva, Oh. 44041

For All Your HVAC Needs Call Us Toll-Free
1-800-533-5484
(440) 466-6640 Fax: (440) 466-2012


www.nordicair.com e-mail: hvac@nordicair.com

- ① Cabinet: 18 gauge Galvalume frame. Access panels on all sides. Panels held in place with snap latches eliminating the need for tools to remove.
- ② 10 fin per inch evaporator coil (others use up to 16 fins per inch which causes them to quickly build up with dirt and corrosion causing the system to malfunction).
- ③ The drain pan is stainless steel.
- ④ The coils are sealed with a corrosion resistant coating. This not only protects the coil from leaks and poor efficiency but makes the coil cleaning much easier.
- ⑤ A reciprocating hermetic compressor is used for long life in the 24-7 schedules demanded by industrial applications.
- ⑥ The blower motor is totally enclosed and has a stainless steel shaft. Others use open motors, which allow dirt and corrosion in the windings.
- ⑦ High and low pressure controls are provided. These controls save other costly components from damage.

FOR WATER COOLED UNITS

- ① The condenser coil is cupra nickel for reliability.
- ② A water regulating valve is incorporated inside the unit.
- ③ Inlet water and drain connections are available on both sides of the unit.

Operating voltages: 208/230/1/60, 230/3/60 and 460/3/60Hz.

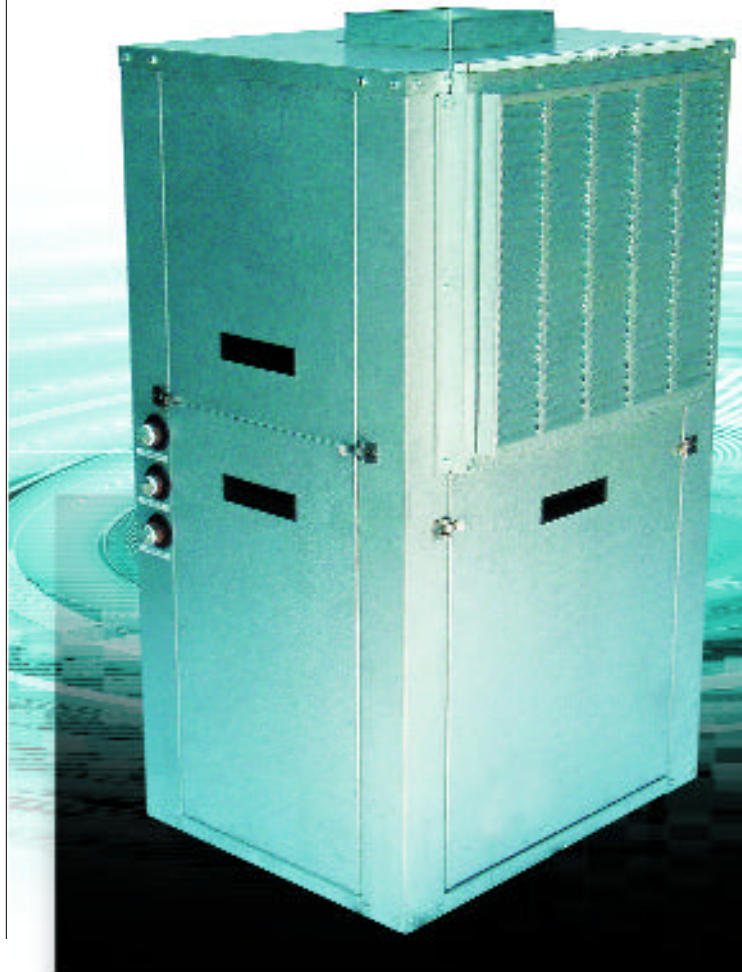

STATIONARY UNIT (SHOWN)

DIMENSIONS: 25 3/4 (W) X 20 (D) X 43 (H)

AIR COOLED

WATER COOLED

MODEL Capacity in BTU

MODEL Capacity in BTU

*2K24AV 24,000

2K18WV 18,000

*2K30AV 30,000

2K24WV 24,000

2K30WV 30,000

2K36WV 36,000

2K42WV 42,000

*FOR HIGH TEMPERATURE APPLICATIONS
CONSULT FACTORY

Optional Features

- ◆ Electric heat
- ◆ Filter Grille
- ◆ Caster Kit
- ◆ Condensate Tank
- ◆ Condensate Pump
- ◆ Remote T-STAT